


MINI DIN 8 pins
 1. Audio Right (unused)
 2. Audio Left (unused)
 3. Video/sync (75R)
 4. Ground
 5. +5V
 6. Blue
 7. Green
 8. Red
 (+5V WIRE IS USED FOR SCART SWITCHING ONLY)

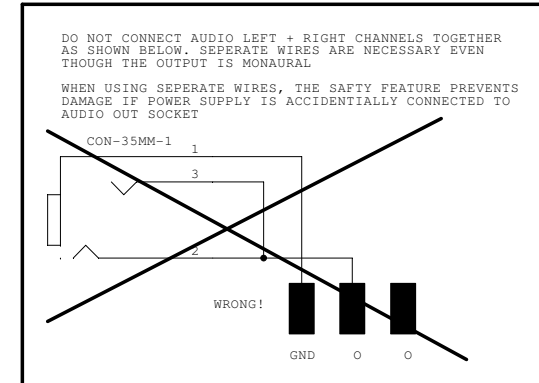

JP1 OPEN FOR TTL SYNC, CLOSE FOR 75 OHM SYNC (RECOMMENDED)
 JP2 CLOSE FOR FRENCH SECAM CONSOLES ONLY
 JP3 Y-TRAP FILTER FREQUENCY. OPEN FOR PAL CONSOLES, CLOSE FOR NTSC CONSOLES. THIS AFFECTS COMPOSITE VIDEO ONLY.

Title		2600RGB WIRING DIAGRAM	
Company			
Author TW			
Size B	Revision		
Date: August 01, 2015	19:36:10	Sheet	of